


PAD EYES TYPE S

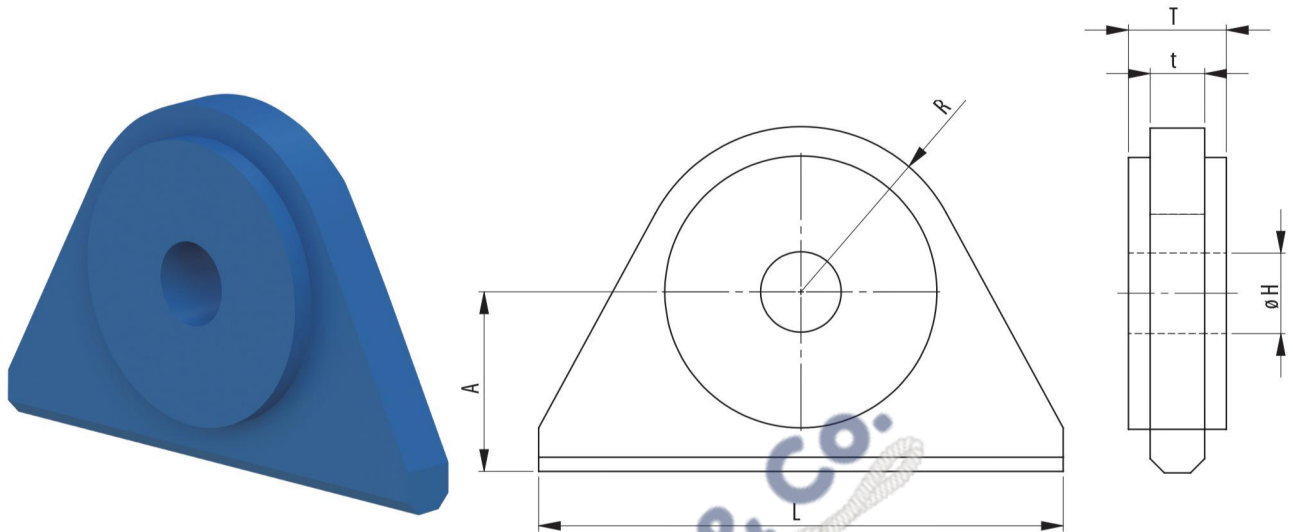

Shackle size	WLL (Mtons)	Dimensions (mm)						Weight (kg)
		L	A	ØH	R	t	T	
3/8	1	76	32	11,5	26	14	14	0,3
7/16	1,5	90	32	13,5	32	15	15	0,5
1/2	2	100	38	17	35	18	18	0,7
5/8	3,25	115	45	20	38	22	22	1,5
3/4	4,75	140	51	23	45	25	25	2
7/8	6,5	150	57	26	51	30	30	3
1	8,5	180	64	29,5	64	35	35	5
1 1/8	9,5	203	76	33,5	76	40	40	7,5
1 1/4	12	216	83	37	83	45	45	10
1 3/8	13,5	228	89	40	89	30	50	10
1 1/2	17	280	140	44	102	40	50	18
1 3/4	25	305	140	53	121	40	60	23
2	35	356	153	60	133	50	70	35
2 1/2	55	482	165	74	152	50	90	55
3	85	559	203	87	178	60	110	90
3 1/2	120	711	254	100	229	70	120	170
4	150	813	280	114	254	80	150	250

Minimum Ultimate Strength = 6 x WLL

- Pad eyes will be supplied including material certificates (S355J2G3, EN 10204 3.1).
- $T \geq 75\%$ of inside width of shackle.
- $H \leq 106\%$ of diameter of pin.
- Weld primer applied.